

USB-C® MALE TO USB-C MALE CABLE (20V 5A) - USB 3.2 GEN 1 (5GBPS)

Perfect solution for connecting two standard USB-C enabled devices or accessories for charging and data transfer.

The USB-C® 3.0 Male cable is the perfect solution for connecting two standard USB-C enabled devices or accessories for charging and data transfer. This cable is a perfect accessory for Apple®, Microsoft® Surface®, and other leading laptops and tablets.

Ensure that a USB-C equipped laptop, smartphone, or tablet is fully charged and ready to go with the 5A charging output, while simultaneously transferring photos, music, or data at speeds up to 5 Gbps.

The USB-C connector has a symmetrical design which is identical on both sides, so no more worrying about whether it's upside-down or right-side-up. It will plug in the first time, every time—while preventing damage to the connector port.

FEATURES

- Syncs and charges enabled devices
- USB-C adapters have reversible, symmetrical designs
- Plug-n-play ready



C2G28882



C2G28882 Side



C2G28882 Front

USB-C® MALE TO USB-C MALE CABLE (20V 5A) - USB 3.2 GEN 1 (5GBPS)

Perfect solution for connecting two standard USB-C enabled devices or accessories for charging and data transfer.

ELECTRICAL SPECIFICATIONS

- **Voltage:** 30V
- **Temperature Rating:** 60°C
- **Conductor Resistance:** at 20°C Max 34AWG: 856.3 Ω/km
- **Insulation Resistance:** 10M-km Min at 20°C DC 500V (EIA-364-21)
- **Dielectric Strength:** AC 500V/1 minute No breakdown (EIA-364-20)


PHYSICAL CHARACTERISTICS

- **Connectors:** USB-C 3.2 Male, Nickel Plated
 - **C2G28882:** Cable Length: 1800±30mm, Overall Cable Dimension: 6.65±0.20mm
 - **C2G28883:** Cable Length: 2000±30mm, Overall Cable Dimension: 6.65±0.20mm
- **Molding:** Black PVC
- **Operating Temperature:** 0° - 50°C; 15-85% Relative Humidity (Non-Condensing)
- **Storage Temperature:** -25°C - 70°C; 15-85% Relative Humidity (Non-Condensing)
- **C2G28882:** QC Inspection: 100% Test for Short/Open/ Miss Wire; Insulation Resistance :10M Ω(min), Contact Resistance: 3Ω(max)
- **C2G28883:** QC Inspection: 100% Test for Short/Open/ Miss Wire; Insulation Resistance :10M Ω(min), Contact Resistance: 3Ω(max)
- Conforms to RoHS, CE Marked & 2011/65/EU RoHS2

USB-C® MALE TO USB-C MALE CABLE (20V 5A) - USB 3.2 GEN 1 (5GBPS)

Perfect solution for connecting two standard
USB-C enabled devices or accessories
for charging and data transfer.

SPECIFICATIONS

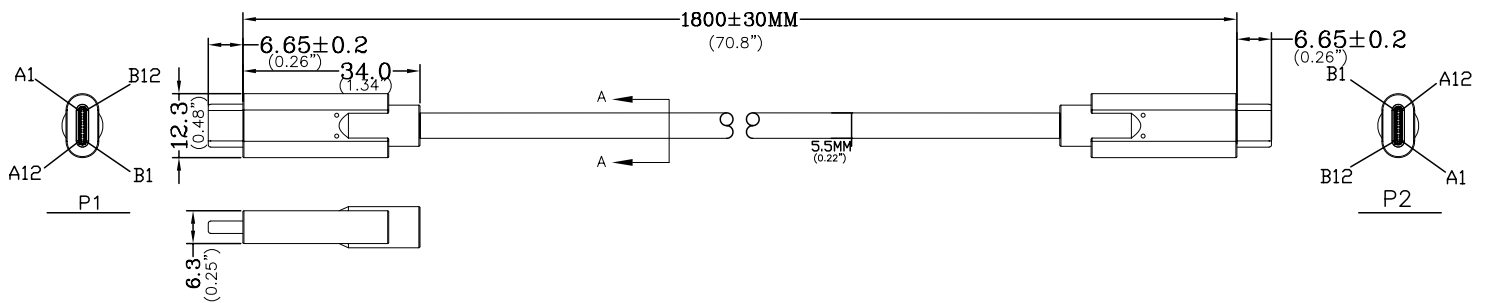

LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

SIMPLIFIED CONNECTIVITY | legrandav.com

USA 800.506.9607 customer-service@c2g.com

©2023 Legrand AV Inc. 220812 Rev C 9/23 C2G, Chief, Da-Lite, Luxul, Middle Atlantic, Vaddio, and Wiremold are registered trademarks of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.